



12W

PTO/SB/17 (01-06)

Approved for use through 07/31/2006. OMB 0651-0032  
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Project of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

Fees pursuant to the Consolidated Appropriations Act, 2005 (H.R. 4818).

## FEE TRANSMITTAL For FY 2006

☐ Applicant claims small entity status. See 37 CFR 1.27

TOTAL AMOUNT OF PAYMENT (\$ ) 0.00

### Complete if Known

Application Number	10/824,658
Filing Date	April 15, 2004
First Named Inventor	Joseph HESS
Examiner Name	Laura E. Martin
Art Unit	2853
Attorney Docket No.	NOVAP0012

### METHOD OF PAYMENT (check all that apply)

☐ Check ☐ Credit Card ☐ Money Order ☒ None ☐ Other (please identify): \_\_\_\_\_

☒ Deposit Account Deposit Account Number: 501281 Deposit Account Name: Griffin & Szipl, P.C.

For the above-identified deposit account, the Director is hereby authorized to: (check all that apply)

☐ Charge fee(s) indicated below ☐ Charge fee(s) indicated below, except for the filing fee

☒ Charge any additional fee(s) or underpayments of fee(s) under 37 CFR 1.16 and 1.17 ☒ Credit any overpayments

WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

### FEE CALCULATION (All the fees below are due upon filing or may be subject to a surcharge.)

#### 1. BASIC FILING, SEARCH, AND EXAMINATION FEES

Application Type	FILING FEES		SEARCH FEES		EXAMINATION FEES		Fees Paid (\$)
	Fee (\$)	Small Entity Fee (\$)	Fee (\$)	Small Entity Fee (\$)	Fee (\$)	Small Entity Fee (\$)	
Utility	300	150	500	250	200	100	
Design	200	100	100	50	130	65	
Plant	200	100	300	150	160	80	
Reissue	300	150	500	250	600	300	
Provisional	200	100	0	0	0	0	

#### 2. EXCESS CLAIM FEES

##### Fee Description

Each claim over 20 (including Reissues)

Each independent claim over 3 (including Reissues)

Multiple dependent claims

Small Entity	
Fee (\$)	Fee (\$)
50	25
200	100
360	180

Total Claims Extra Claims Fee (\$) Fee Paid (\$)

- 20 or HP = \_\_\_\_\_ x \_\_\_\_\_ = \_\_\_\_\_

HP = highest number of total claims paid for, if greater than 20.

Indep. Claims Extra Claims Fee (\$) Fee Paid (\$)

- 3 or HP = \_\_\_\_\_ x \_\_\_\_\_ = \_\_\_\_\_

HP = highest number of independent claims paid for, if greater than 3.

#### 3. APPLICATION SIZE FEE

If the specification and drawings exceed 100 sheets of paper (excluding electronically filed sequence or computer listings under 37 CFR 1.52(e)), the application size fee due is \$250 (\$125 for small entity) for each additional 50 sheets or fraction thereof. See 35 U.S.C. 41(a)(1)(G) and 37 CFR 1.16(s).

Total Sheets Extra Sheets Number of each additional 50 or fraction thereof Fee (\$) Fee Paid (\$)

- 100 = \_\_\_\_\_ / 50 = \_\_\_\_\_ (round up to a whole number) x \_\_\_\_\_ = \_\_\_\_\_

#### 4. OTHER FEE(S)

Non-English Specification, \$130 fee (no small entity discount)

Other (e.g., late filing surcharge): Claim for Priority and Priority Document

Fees Paid (\$)

0.00

#### SUBMITTED BY


Signature		Registration No. (Attorney/Agent) 31,799	Telephone (703) 979-5700
Name (Print/Type)	Joerg-Uwe Szipl		Date June 23, 2006

This collection of information is required by 37 CFR 1.136. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 30 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

BEST AVAILABLE COPY

**THIS PAGE BLANK (USPTO)**



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Patent Application of ) Attorney Docket No.: **NOVAP0012**  
Joseph HESS et al. ) Confirmation No.: 7721  
Serial No.: 10/824,658 ) Group Art Unit: 2853  
Filed: April 15, 2004 ) Examiner: Laura E. Martin  
For: LOW-COST LIQUID DROPLET ) Date: June 23, 2006  
SPRAY DEVICE AND NOZZLE )  
BODY )

**SUBMISSION OF CLAIM FOR PRIORITY AND PRIORITY DOCUMENT**

U.S. Patent and Trademark Office  
Customer Service Window  
Randolph Building  
401 Dulany Street  
Alexandria, VA 22314


Sir:

It is respectfully requested that this application be given the benefit of the foreign filing date under the provisions of 35 U.S.C. §119 of the following, a certified copy of which is submitted herewith:

<u>Application No.</u>	<u>Country of Origin</u>	<u>Filing Date</u>
03008077.4	Europe	April 15, 2003

Respectfully submitted,

*GRIFFIN & SZIPL, P.C.*

  
\_\_\_\_\_  
Joerg-Uwe Szimpl  
Registration No. 31,799

GRIFFIN & SZIPL, P.C.  
Suite PH-1  
2300 Ninth Street, South  
Arlington, VA 22204  
Telephone: (703) 979-5700  
Facsimile: (703) 979-7429  
Email: gands@szipl.com  
Customer No.: 24203

**THIS PAGE BLANK (USPTO)**



**Europäisches  
Patentamt**

**European  
Patent Office**

**Office européen  
des brevets**

**Bescheinigung**

**Certificate**

**Attestation**

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

**Patentanmeldung Nr.    Patent application No.    Demande de brevet n°**

03008077.4

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

**R C van Dijk**

**THIS PAGE BLANK (USPTO)**



Anmeldung Nr:

Application no.: 03008077.4

Demande no:

Anmeldetag:

Date of filing: 15.04.03

Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

MICROFLOW ENGINEERING SA, GALILEO Center  
Rue de la Gare  
2034 Peseux  
SUISSE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:

(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.

If no title is shown please refer to the description.

Si aucun titre n'est indiqué se referer à la description.)

Low-cost liquid droplet spray device and nozzle body

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)  
revendiquée(s)

Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

B05B/

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL  
PT SE SI SK TR LI

**THIS PAGE BLANK (USPTO)**



EPO - Munich  
67

15 April 2003

BB49086

EPO - Munich  
67

15 April 2003

LOW-COST LIQUID DROPLET SPRAY DEVICE AND NOZZLE BODY

The present invention relates to a liquid droplet spray device suitable for atomising a liquid substance, in particular a highly viscous liquid substance such as a personal or an ambient fragrance or a functional liquid such as an insecticide or a medicated liquid. Such a device may be used, e.g., for fragrance or functional liquid dispensers, for inkjet printer heads, or for controlled deposition of an array or arrays of droplets on a surface. The device delivers the liquid substance as a tight dispersion of atomised droplets. More specifically, the present invention concerns a low-cost liquid droplet spray device which efficiently creates and fully expels a liquid droplet spray and prevents leaking of the liquid in various dispensing, storage or carrying positions. More specifically, the present invention relates to a nozzle body for such a liquid droplet spray device. Various devices are known for atomising a liquid. For example, the documents EP-A-0 923 957 and EP-A-1 005 916, both in the name of the present Applicant describe a liquid droplet spray device. A brief description of the liquid droplet spray device known from these documents, which are hereby incorporated by reference, is given here while referring to Figure 1.

In this particular embodiment spray device 1 consists of a housing formed of a superposition of a first, or a top substrate 5 and a second, or a bottom substrate 6 in-between which a chamber or a space 2 is formed for containing a liquid substance 3 and thus providing a capillary filling and compression chamber. Top substrate 5 contains outlet means consisting of cavity or cavities 7 which can partly

constitute space 2, outlet nozzles 9 and output channels 10 connecting these nozzles to space 2.

Liquid substance 3 enters spray device 1 by way of, e.g., a very low pressure, e.g., around a few millibar or slightly negative pressure, or capillary action. This can be achieved for example by way of at least one input tube or needle 4 through which the liquid substance may be supplied from an external reservoir (not shown) into spray device 1. Spray device 1 further comprises a vibrating element 8, e.g. a piezoelectric element to cause vibration of liquid substance 3 in space 2.

The method of manufacturing this device is carried out by using technology known from the field of semiconductors. Thus, top and bottom substrates may be manufactured in a similar manner e.g. by etching a silicon wafer in a suitable manner, e.g. by wet or dry etching and by using one or more masks or by micro-machining Pyrex wafers. The substrates 5 and 6 are attached to each other, preferably by appropriate bonding technique, such as anodic bonding, so as to form and enclose space 2.

These prior art documents further describe techniques allowing for output channels with a straight, non-tapered profile. This provides for a precisely defined pressure drop, droplet size and flow behaviour across output channel 10 for aqueous solutions and suspensions whereas the relatively smooth surface is suited for medications carrying small solid particles, e.g. from less than 1 to approx 2  $\mu\text{m}$ , in suspensions. But output channels with a straight, non-tapered profile are also suitable for more viscous liquids, such as ambient fragrances which depending on the fragrance concentration however would normally tend to wet the surface

of top substrate 5 and therefore might inhibit effective dispensing of such liquids.

The same effect can be obtained proportionally with larger dimensions, e.g. with nozzles of 10  $\mu\text{m}$  or larger for example for personal perfume or for functional liquid dispensing applications or in a practical variation of the cited prior art of the applicant by simply using the vertical plasma etching micro-machining method to produce an output channel whose cross-section is divided into two or more identical sub-channels to allow for an even finer control of pressure drop, droplet size and flow behaviour across said channel 10. The cross section of the vertical channel or channel section can be of a suitable geometrical form, e.g. circular, triangular or a suitable geometrical shape such as a cross when the channel consists of several identical sub-channels. The cross section of the cavities 7 can also be of suitable geometrical form or combination of forms.

Figure 2a shows a schematic detailed view of the first, or top substrate of this prior art liquid droplet spray device. The top substrate is shown upside down with respect to Figure 1 in a further practical variation of the cited prior art which has already been shown with an inversion of the bottom substrate, thus further reducing dead space. As can be seen, top substrate 5 comprises the cavities 7, output channels 10 and outlet nozzles 9. The top surface of the substrate-delimiting cavity 7 forms a membrane section in substrate 5.

The surface of this membrane section is much larger than the actual nozzle surface, so that it is possible to provide a very large number of outlet nozzles 9 on the membrane surface in order to eject more droplets simultaneously. As

already mentioned in the cited prior art, it is obvious that cavities 7 are not necessarily tapered but can be straight according to the manufacturing process chosen. Figure 2b shows a close-up view of a part of figure 2a in which it can be seen that the output channels 10 and outlet nozzles 9 may be readily placed according to the specific conditions.

The diameter of a droplet depends among other factors on the nozzle hole size "d" for a given frequency of the vibration of the liquid substance and the inlet pressure. In this prior art device where a frequency of around 250 kHz is used, the mean droplet diameter has been found to be around 5  $\mu\text{m}$ , the diameter of the hole of nozzle 9 is around 7  $\mu\text{m}$  and the inlet pressure is a few millibars. One such a droplet thus contains a quantity of around 67 femtolitres ( $10^{-15}$  l) so that the number of nozzles may be determined as a function of the amount to be ejected.

This document further shows an embodiment where the top substrate may be micromachined in such a way as to provide recessed areas around the output nozzles such as shown in figure 4 of this document. Thus, the actual nozzle outlet protrudes from the main surface of the top substrate and contributes to the monodispersive nature of the ejected spray by providing minimum stiction surface for the liquid around the output nozzles. Alternatively if the total area constituted by the membrane section in substrate 5, meaning the total top surface of the substrate-delimiting cavity 7 is recessed, all output nozzles will protrude.

A further liquid droplet spray device is known from the document WO-A-00/06388. This device also has a first substrate provided with a piezo-electric vibrating element, and a second substrate provided with outlet means.

Both substrates enclose a chamber for containing a liquid substance, in a manner similar to the above-described prior art. The outlet means are manufactured in such a way that here too recessed areas are created around the nozzle outlets so that the outlet nozzles protrude from the main surface of the second substrate so as to reduce stiction.

However, these devices use expensive manufacturing techniques such as DRIE (deep Reactive Ion Etching) or plasma etching) and require many manufacturing steps on a relatively large surface of silicon, resulting in a comparatively expensive device.

Further, it is known that the droplet diameter varies with certain physico-chemical properties of the liquid such as surface tension and viscosity. It is therefore important as shown in the cited prior art to be able to adapt the physical and electrical device parameters (frequency and amplitude) according to the liquid to be expelled and the desired droplet characteristics.

The applicant has now found that although the prior art device generally functions satisfactorily, the construction of this device has limits if it needs to be manufactured in a cheap manner, such as when used as a personal or ambient perfume dispenser instead of a very precise medication dispenser, thereby still ensuring sufficient rigidity and precision when manufacturing the nozzle outlet means and therefore complying with formal, informal or introductory specifications required by environmental and health related institutions.

Furthermore, when such a device is used to expel liquid substances of high viscosity such as perfume or some functional liquids, there is a much larger problem of retention of the liquid when being expelled from the nozzle

outlet means leading to wetting and an uncontrollable droplet size, because portions of the droplets to be expelled may stick to the outer surface of the nozzles and create a thin liquid film there which will interfere with following droplets trying to detach from the nozzles. A higher power is then needed to actually cause the droplet to detach from the nozzle outlet, and small droplets are then released as a part and may stay behind as a satellite droplet due to the retention with the film on the top surface surrounding the nozzle outlets caused by the stiction of the expelled liquid. For some liquids surface wetting due to retention forces being higher than dispensing forces will go beyond creating satellites, it may simply prevent droplet generation. This problem will be compounded if nozzles are set closer to each other for reasons of cost hence size reduction. Surface capillary forces will tend to create a liquid film connecting all nozzles.

For liquids requiring to be expelled in larger droplets and consequently being dispensed by nozzle outlets with larger diameters, the effect of retention on the surface might turn into a straightforward leakage, even if the device is passive and especially if it is held upside down. Up to a certain point, the use of flexible foil airless bags might prevent leakage, but as of a certain diameter of the outlet nozzle, this also becomes ineffective.

It is, therefore, an object of the present invention to provide a nozzle body for a liquid droplet spray device as well as a liquid droplet spray device that overcomes the above-mentioned inconveniences and that can be efficiently used for high viscous liquids such as perfumes or other non-aqueous solvent based liquids.

It is another object of the present invention to provide such a nozzle body and device that is simple, reliable and inexpensive to manufacture, small in size and low in energy consumption and cost, and as such suitable as a personal or ambient fragrance and functional liquid dispenser.

Thus, the present invention concerns a nozzle body and corresponding liquid droplet spray device as defined in the appended claims.

Thanks to the construction of the nozzle body according to the present invention an efficient device may be obtained in a relatively simple and inexpensive manner.

Other features and advantages of the nozzle body according to the present invention will become clear from reading the following description, which is given solely by way of a non-limitative example thereby referring to the attached drawings in which:

FIGURE 1 is a schematic cross-section of a prior art liquid droplet spray device,

FIGURE 2 2a to 2b show schematic detailed views of the top substrate of the prior art liquid droplet spray device of Figure 1,

FIGURE 3 shows a first example of a nozzle body and a liquid droplet spray device according to the present invention,

FIGURE 4 shows the outlet means of the nozzle body of figure 3,

FIGURE 5 shows in more detail an output channel of the outlet means of Figure 4,

FIGURE 6 shows a second example of a nozzle body and a liquid droplet spray device according to the present invention, and

FIGURE 7 shows an example of a device with the internal space being constituted according to a variation of Figure 3 and enclosing a soft, porous material entrapping the liquid to be expelled.

An example of a preferred embodiment will be described hereafter. The present invention thus concerns a nozzle body for nebulising a liquid substance of high viscosity. In this respect, high viscosity means that it is 2 mPas or higher (milli-Pascal second). The present invention also concerns a liquid droplet spray device incorporating such a nozzle body. For ease of understanding, the structure of the nozzle body and spray device will first be described while referring to figures 3, 4 and 5. In principle, the spray device may be rather similar to the above described prior art spray device of the present applicant.

Thus, the present spray device also comprises a first substrate 2 and a second substrate 4 which enclose a space 3, in a rather similar manner as shown in Figure 1. Space 3 constitutes a liquid substance chamber, for example for containing ambient or personal fragrance or some other highly viscous functional liquid, directly or entrapped in a soft porous medium. If the liquid is entrapped in a porous medium, it will not tend to wet the outside surface of substrate 4 or leak out. Such medium can have standard, micro- or nano-structured subparts and may be at the core or on the border surfaces of space 3, capillary channels 6 and/or a reservoir (not shown) which provides the liquid to space 3 via capillary channel 6. An example of an arrangement comprising such soft porous medium is described hereafter while referring to figure 6.



As shown in figure 3, first substrate 2 is placed upside down compared to first substrate 5 of figure 1. Substrates 2 and 4 form together a nozzle body 1, and may be formed by 2 parts as shown in Figure 3. Substrate 2 can be made of a polymer and second substrate 4 can be made of silicon as described, another material or a sandwich of different or same materials such as described further on.

Second substrate 4 is provided with membrane sections 4a which are thinner sections of the substrate obtained by removing parts of the substrate using appropriate methods such as micro-machining to guarantee homogeneous membrane thickness. The manner of obtaining such membrane sections may be similar to that as described in the above referenced prior art document EP-A-0 923 957, and is well known to the skilled person from the field of semiconductor etching.

The etching may be done by wet or dry etching resulting in a cavity 7 with inclined or in straight sidewalls where the bottom of the cavity constitutes the membrane section. The non-etched sections of the second substrate 4 constitute reinforcement sections 4b thus surrounding the membrane sections 4a. These reinforcement sections provide the required rigidity to the nozzle body to avoid it breaking up when pressure is applied to a liquid substance contained in space 3.

Alternatively substrate 4 can also be constituted as a metal structure whose critical parts have been advantageously manufactured by low cost LIGA (Lithography defined galvanic deposition). This metal structure, which may be Nickel, stainless steel or the like, can then be assembled as a sandwich between part 4a, corresponding to the membrane section and part 4b, corresponding to the reinforcement section.

Alternatively substrates 2 and 4 can also be machined integrally from one single piece. For example, by using ion or proton beam internal 3D micro-machining, it is possible to obtain a space within a single polymer blank substrate, such that substrate components 2 and 4 are actually formed from and within a single substrate.

Space 3 is preferably formed in first substrate 2, for example by etching a recess in a main surface of first substrate 2.

Further, appropriate means, such as a capillary channel 6 for supplying the liquid substance to and allowing exiting from space 3 is provided as known from the mentioned prior art. Such a capillary channel can be advantageously configured to act as a passive valve or as a capillary intersection for a manually activated valve. These are known as such and serve to allow the liquid substance to enter and exit the space or chamber 3.

For some applications it is advantageous to be able to eject two different liquids stemming from 2 different reservoirs contained within the same liquid droplet spray device through the same nozzle outlet means of the that device. To this effect, in an alternative arrangement, it is possible to split space 3 into two sub-spaces 3a and 3b via a thin, leak-tight membrane or other gasket type vertical separation located in space 3. Each sub-space is connected to a reservoir, for example by way of its own capillary channel, thus allowing to feed two different liquids to be ejected together through the nozzle membrane section. A schematic representation of such sub-spaces is shown in figure 6.

Capillary channel 6 can also contain a soft porous medium, standard, micro- or nano-structured, connected on

one side to space 3, which itself may also contain such soft porous medium, and connected on another side into the reservoir such as an airless bag or other known reservoir for viscous liquids such as personal or ambient fragrances and functional liquids such as insecticides.

At least one outlet nozzle 19 and at least one output channel 20 for connecting space 3 to each outlet nozzle 19 are further provided in the thinner membrane section 4a of second substrate 4. It is of course important that the output channel 20 has straight sidewalls so as to be able to define the pressure drop across the channel when a droplet is ejected, as already explained in detail in the above-mentioned prior art EP-A-0 923 957.

A vibrating element such as a piezoelectric element 8 may be disposed on first substrate 2 to vibrate any liquid substance in space 3. Said vibration can be transmitted advantageously via a thin metal membrane joined both to substrate 2 and piezoelectric element 8. More preferably, the vibrating element is arranged separately from first substrate 2 and can be brought into tight contact with nozzle body 1 by using appropriate attachments means. These attachment means thus allow to fixedly or removably attach the vibrating element to first substrate 2, for example by clamping means or by adhesive surface treatment. Such attachment means are known as such, see for example the previously cited document EP-A 0 923 957. When the liquid is excited at an appropriate frequency and under the appropriate pressure, it will be ejected as a spray of droplets through the outlet nozzles with a very low exit velocity. The preferred operation is at the fundamental resonance frequency or at related harmonics.

In a variant, the vibrating means may be arranged to be in direct contact with second substrate 4, in such a way that it does not impair vibration of the membrane section(s), as shown for example in Figure 7.

The transition of output channel 20 from space 3 to outlet nozzle 19 is not only non-tapered and straight, but is also step-shaped. As can be seen in figure 4, output channel 20 consists of a wider portion 20a and a thinner portion 20b. Wider portion 20a of output channel 20 has a larger diameter than thinner portion 20b and can have the same or a different length as the thinner portion. In a preferred embodiment, the length of wider portion 20a is around 15  $\mu\text{m}$ . Wider portion 20a is arranged adjacent space 12 containing the liquid substance which is to be expelled.

Thanks to the stepped shape of the output channel 20, the excited liquid is forced at a higher pressure into the thinner portion 20b of the output channel. Thus, the eventual size of the droplet results mainly from the liquid volume that is contained in the thinner portion 20b.

According to the present invention, thinner portion 20b of output channel 20 further has a protrusion section 20c, which extends beyond the top surface of second substrate 4, as also shown in Figure 5. According to the present invention this protrusion section 20c is applied independently of the use or intended application but as of a certain set of physico-chemical set of parameters and is manufactured in such a manner that its exterior side walls are at an angle  $\alpha$  that is substantially straight with respect to the top surface of the second substrate 4, i.e.  $\alpha \approx 90^\circ$ . As an example, the total length of the thinner portion may be 7.5  $\mu\text{m}$ , with the thinner portion contained within second substrate being around 5  $\mu\text{m}$ , and the length of the

protrusion section 20c being around  $2.5\text{ }\mu\text{m}$ . The thickness of the exterior sidewalls may be around  $0.5$  to  $1.5\text{ }\mu\text{m}$ , preferable around  $1\text{ }\mu\text{m}$ . This thickness should be as small as possible, but should be sufficiently thick to avoid breaking of the nozzle when liquid is expelled there through.

As the present nozzle body is designed for expelling highly viscous liquids such as fragrant and functional liquids with their solvents, the dimension of the nozzle outlet may not be chosen to be too small or too large. In fact, one known requirement for personal perfume is that not more than 5% of expelled droplets are larger than  $10\text{ }\mu\text{m}$  in diameter to avoid inhalation which might lead to irritation problems.

Thus, the diameter of the nozzle outlet 19 must be chosen such that expelled droplets are not too small or not too large in diameter.

In either case, thanks to the protrusion section 20c of output channel 20, there is a minimal risk of retention of the high viscous liquid when expelled, i.e. the droplet leaving the nozzle outlet 19 will fully depart from the nozzle body without entering into contact with any liquid film covering the surface of the nozzle body. This means that less power is required to expel the droplet, as there is nothing holding it back. Further, the actual size of the droplet being expelled will be slightly larger than when there is retention or stiction due to the fact that there is no loss of liquid due to stiction. This reduction in stiction is further enforced by the substantially straight angle  $\alpha$  of the sidewalls of the output channel with respect to the top surface of second substrate 4.

It should be noted that the length of the protrusion section 20c of the output channel should be chosen such that

the nozzle outlet is sufficiently far way from the top surface to avoid stiction, but not long enough to require a high power for expelling the droplets due to increased pressure drop across the output channel.

Furthermore, by using such protrusion sections, and thus by avoiding stiction, it is possible to provide a higher density of output nozzles in one single cavity or membrane section, because there is no dispersion of liquid on the top surface of the second substrate, i.e. on the bottom of the cavity constituting the membrane section 4a. For example the present Applicant has found that such protrusion sections allowed to place 2700 nozzles on a surface of second substrate 4 corresponding to more than 15 membrane sections 4a whereas before 1300 nozzles were placed on a surface of more than 50 membrane sections 4a, resulting in the same or better flow rate.

Moreover, by having the exterior side wall of the protrusion sections at a substantially straight angle, any liquid that is not fully released from the nozzle outlet will immediately flow down the outside of the output channel and will thus not interfere with a following droplet. Indeed, if this angle  $\alpha$  is not substantially  $90^\circ$ , there is a high risk of accumulated retention of the following droplets by any remaining liquid and finally spreading on the surface of membrane section 4a.

Also, as mentioned above, for a same diameter of the nozzle output channel, larger droplets will be expelled, so that again a higher density of channels and outlets may be provided within a single cavity. For perfume applications, the ideal average droplet size is around 15 to 20  $\mu\text{m}$ , so that the diameter of the nozzle outlet can be around 17  $\mu\text{m}$ .

Each cavity contains at least one outlet, but may also contain a plurality of outlets. For example, as mentioned before it is possible to provide a very high number such as 169 or even more outlets in a single cavity 7 or on a single membrane section 4a, versus 25 or 49 such as used in prior art devices.

Furthermore, due to the features of the output channel and its protrusion section, the top surface of second substrate will remain substantially free of liquid. Thus, it is therefore possible to remove the nozzle body from a vibrating element and replace it with another nozzle body without any liquid spilling out. This also allows for a low cost dispenser as the same vibrating element may be used many times for several liquids. Thus, in such a case, the nozzle body may be conceived as a disposable cartridge that can be fixed to the vibrating element to function as a liquid droplet spray device.

Advantageously, the nozzle body may be made of silicon or any suitable material that is adapted to be processed with the required tolerance. In fact, the second substrate 4 of nozzle body 1 is the only part that needs to be made to critical tolerances.

Another example of a liquid droplet spray device containing a soft porous medium, indicated by reference 12, arranged within space 3 is shown in Figure 6. As can be seen, a vibrating element 8a is arranged here in contact with second substrate 4 instead of with first substrate 2 as shown previously. Such arrangement should of course avoid impairing the transmission of the vibration to the liquid substance that is present in soft porous medium 6. The outlet means are not shown in detail, but are simply indicated by a dotted line 19a. However, the outlet means

are of course similar to those shown in previous embodiments. A valve 13 may be provided for controlling the access of a reservoir (not shown) to the soft porous medium (or space 3), in a manner known to a skilled person.

As may be understood from the above embodiments, it is possible to reduce the use of silicon or the like as much as possible, i.e. to the nozzle body, or even only the second substrate, so that a cheaper device may be obtained by using suitable other materials for the remaining parts and corresponding micro-machining methods. Indeed, when using ion or proton beam micro-machining methods plastic, PET, PTFE or the like and resins may be used to create the first substrate 2 and the second substrate 4 from and within one piece, thereby obtaining a sufficiently precise and rigid, and thus reliable, device.

Having described a preferred embodiment of this invention, it will now be apparent to one of skill in the art that other embodiments incorporating its concept may be used. It is felt, therefore, that this invention should not be limited to the disclosed embodiment, but rather should be limited only by the scope of the appended claims.



CLAIMS

1. Nozzle body (1) for a liquid droplet spray device for nebulising a viscous liquid substance such as functional liquids, medicated or not, sanitizing or not, fragranced or not, comprising:

- a first substrate (2) in which a space (3) is formed,
- a second substrate (4) having at least one nozzle membrane section (4a) and reinforcement sections (4b),

wherein said first and second substrates (2, 4) are arranged such to enclose the space (3),

wherein each said nozzle membrane section (4a) comprises at least one outlet nozzle (19) and at least one output channel (20) which connects said enclosed space (3) with each of said at least one outlet nozzles, said outlet nozzle and said output channel having a tightly-toleranced, straight, non-tapered shape,

wherein said second substrate (4) has a top surface in which at least one tapered cavity (7) is formed so as to provide said nozzle membrane section (4a) corresponding to the bottom of said cavity (7) with surrounding reinforcement sections (4b), and a bottom surface adjacent to and enclosing said space (3) thus forming a chamber for containing said liquid substance,

wherein said nozzle output channel (20) is step-shaped with a wider portion (20a) being adjacent said space (3) and a thinner portion (20b) containing a protrusion section (20c) protruding beyond the top surface of said second substrate (4) such that the exterior side wall of the protrusion section (20c) of said output channel (20) is at a substantially straight angle with respect to the top surface of said second substrate (4).

2. Nozzle body according to claim 1, wherein said first and second substrate are formed integrally from one substrate.

3. Nozzle body according to claim 1 or 2, wherein said space (3) consists of a soft porous medium for containing the liquid substance.

4. Nozzle body according to claim 1 or 2, wherein said space (3) consists of at least two sub-spaces (3a, 3b) separated by a flexible but leak-tight separation, each sub-space containing a different liquid to be ejected together through said nozzle membrane section (4a).

5. Liquid droplet spray device for nebulising a high viscous liquid substance, comprising:

- a nozzle body according to anyone of the preceding claims, and
- a vibrating element disposed to vibrate liquid in said space so as to eject said liquid substance as a spray through said outlet nozzles.

6. Liquid droplet spray device according to claim 5, wherein said vibrating element is attached to said nozzle body through removable attachment means.

AbstractLOW-COST LIQUID DROPLET SPRAY DEVICE AND NOZZLE BODY

The invention concerns a nozzle body (1) for a liquid droplet spray device for atomising a high viscous liquid substance such as perfume. A first and second substrate enclose a space for containing the liquid substance. Outlet means are arranged in the second substrate (4) and comprise at least one outlet nozzle (19) and at least one output channel (20), said output channel (20) having straight side-walls.

Each output channel (20) has a stepped shape having a wider portion (20a) and a thinner portion (20b), the wider portion being arranged adjacent the space (3). The thinner portion (20b) contains a protrusion section (20c) protruding beyond the top surface of the second substrate (4) such that the exterior side wall of the protrusion section (20c) is at a substantially straight angle with respect to the top surface of the second substrate (4).

Figure 4

**THIS PAGE BLANK (USPTO)**

Fig. 1 Prior Art

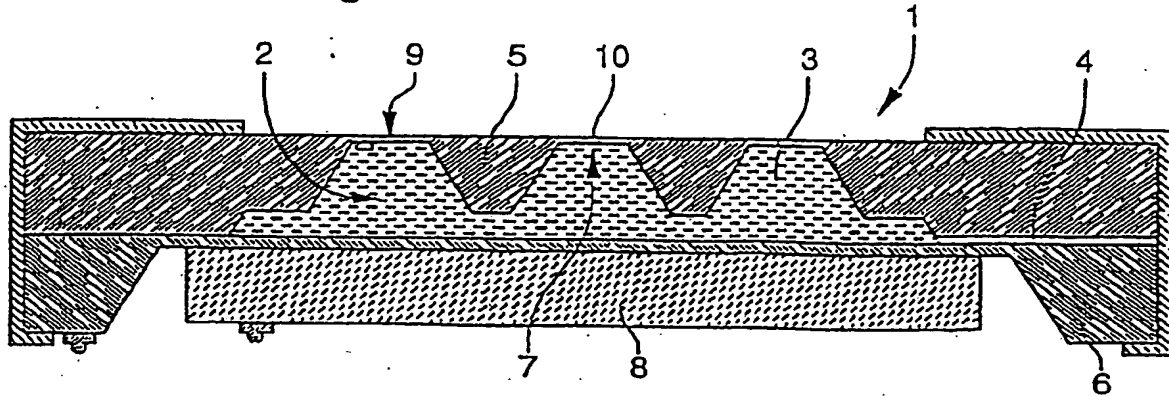


Fig. 2a Prior Art

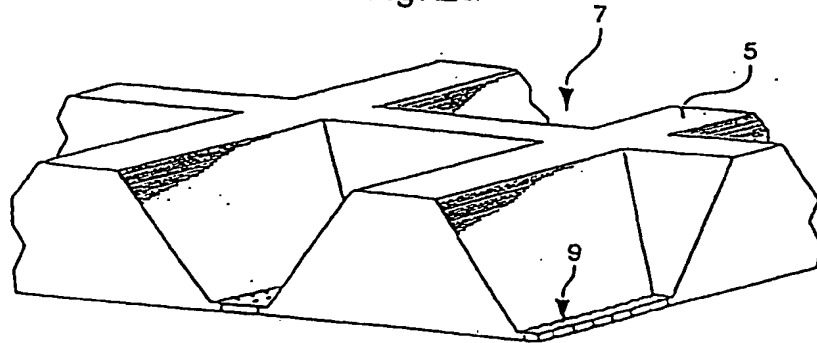
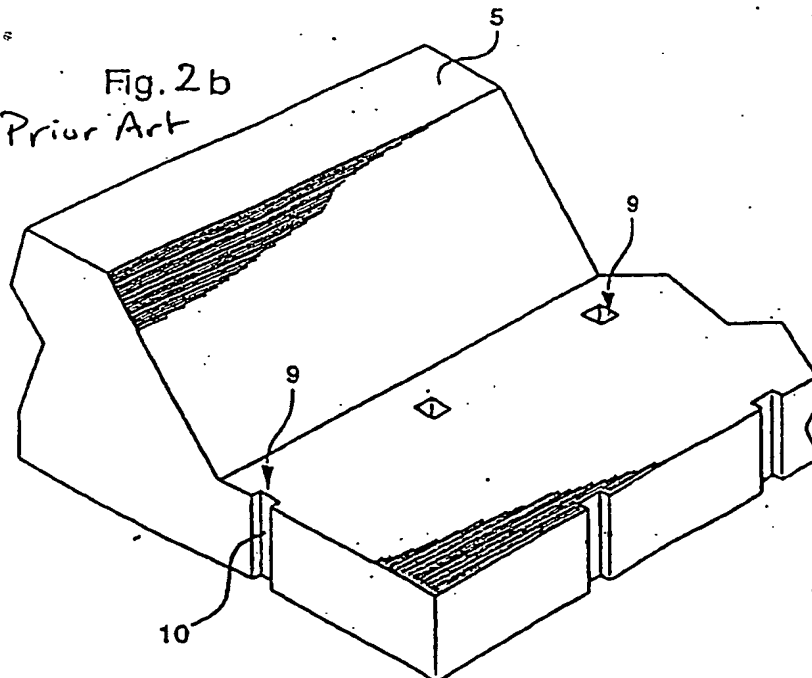


Fig. 2b  
Prior Art



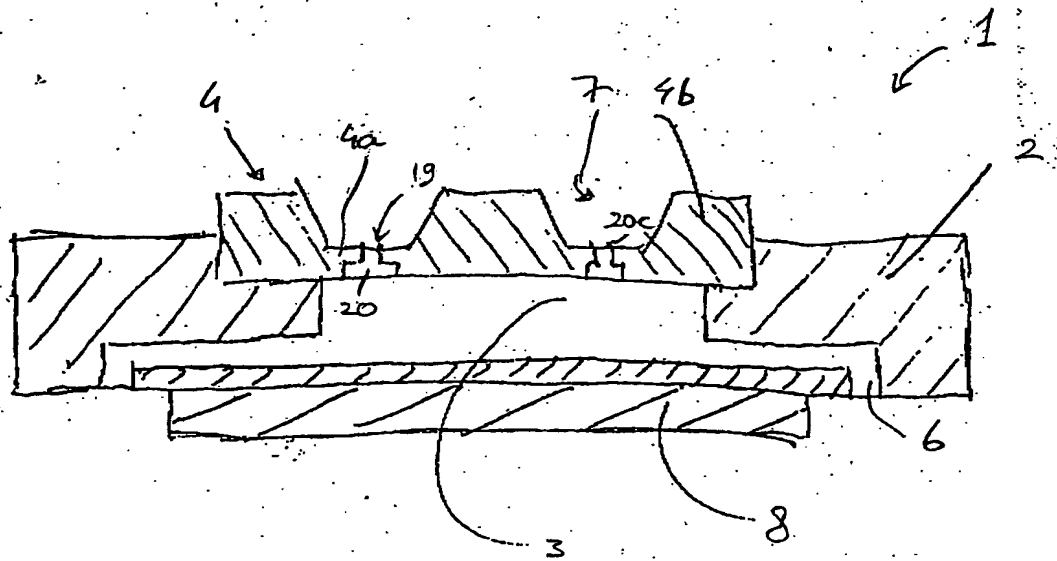


Fig. 3

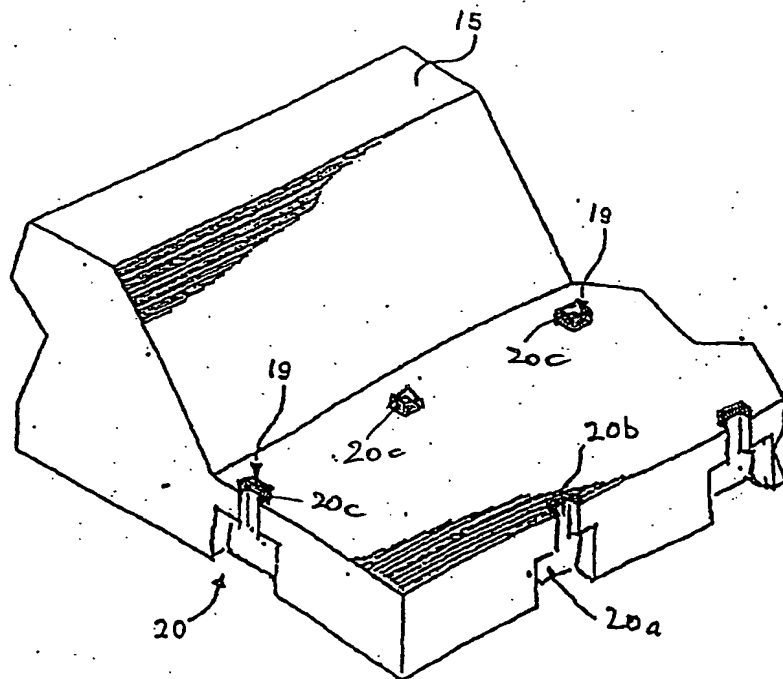


Fig. 4

3/5

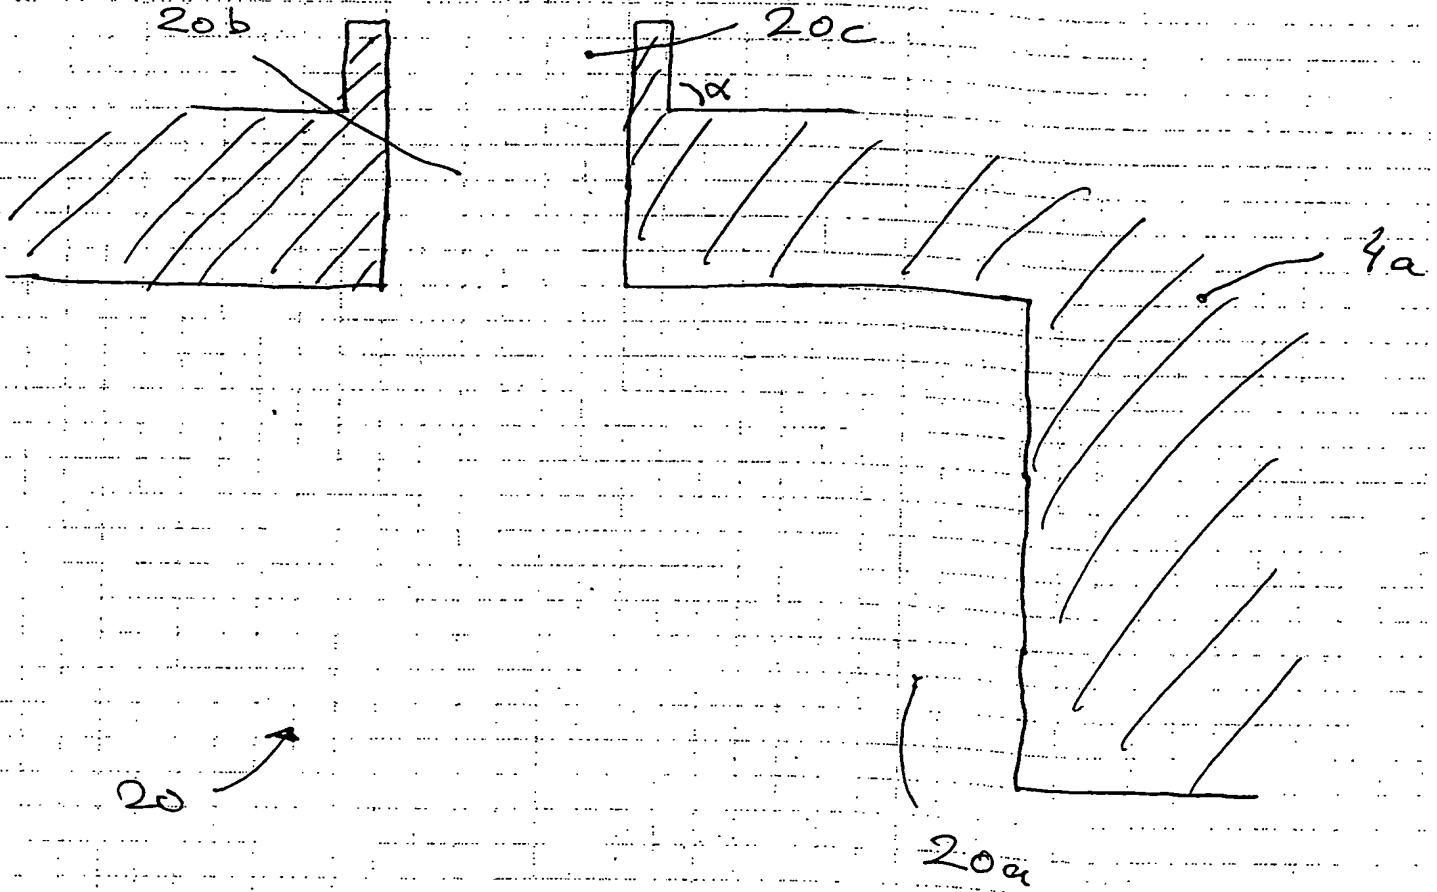
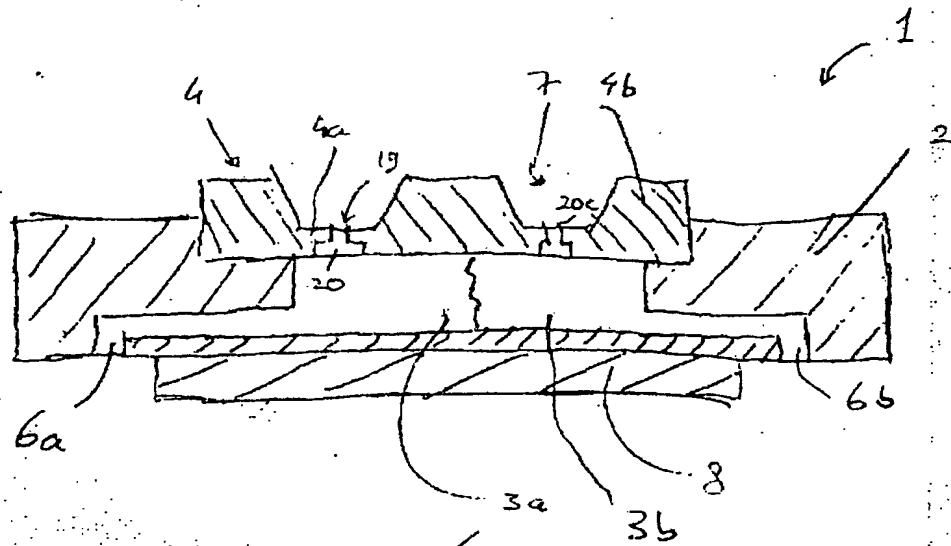


Fig 5





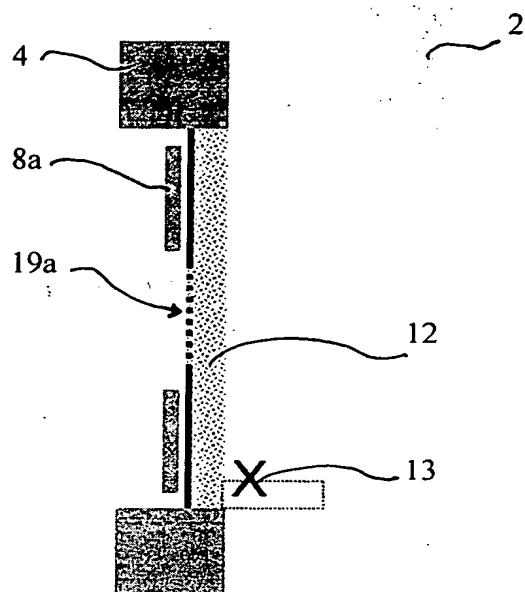


FIG. 7

**THIS PAGE BLANK (USPTO)**

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ ~~COLOR OR BLACK AND WHITE PHOTOGRAPHS~~
- ☐ GRAY SCALE DOCUMENTS
- ☒ ~~LINES OR MARKS ON ORIGINAL DOCUMENT~~
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**